


INSTALLING THE ELASTIC STRAP

FOR ALL FOXFURY HEADLAMPS | APPROXIMATELY 5 MINS

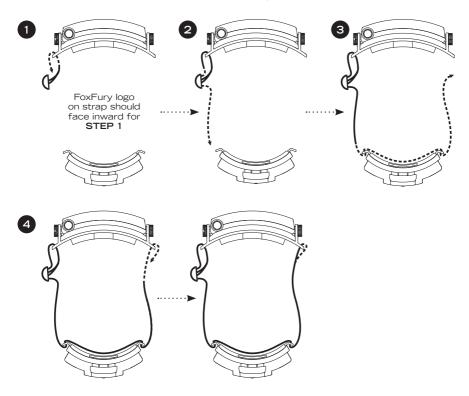

Place the headlamp on a flat surface. Position the Light Head so the Power/Mode Switch is on the left and the LEDs face forward. NOTE: Make sure the FoxFury logo on the Battery Pack is correctly oriented before beginning.

- 1 Begin with the end of the strap that does not have the Buckle attached. With the FoxFury logo side of the strap facing right, feed the strap through the left Buckle Slot of the Light Head.
- 2 Run the free side of the strap back through the Buckle. NOTE: The FoxFury logo on the strap will now be facing to the left.
- 3 Run the remaining bit of strap through the left Buckle Slot on the Battery Pack (on the cable side). Then continue through the Buckle Slot on the right side of the Battery Pack.
- 4 Continue to run the strap through the Buckle Slot on the right side of the Light Head. Firmly press the velcro together to finish installing the Strap. Adjust the Battery Pack position and strap length at the Buckle for the desired fit.